

# OmniFare™

## Hybrid Contactless Smart Card and MagStripe Card Reader

### Reads Smart Cards and MagStripe Cards

Proximity smart card reading technology meets magnetic stripe reading technology with the hybrid OmniFare™ card reader. Customers will appreciate the versatility of a card reader that reads MiFare contactless cards, as well as MagStripe cards. The OmniFare™ reads data from a variety of contactless sources including cards, key fobs, and other tokens. The OmniFare™ is offered with RS-232 and USB HID interfaces.

### Easy to Use

The OmniFare™ is designed for a variety of access control and individual identification applications. The unit can be mounted on a counter top, and the clear visibility of the LED panel makes it easy for users to view they have completed a successful read operation.

### High Performance

The OmniFare™ is made to withstand daily use and wear. The rugged design provides protection from vandalism, and allows for weather-resistant operation. Its housing is constructed of a sturdy base, an impact-resistant cover, and a stainless steel card slot wear plate. Options include weatherproof, sealed, or extended temperature versions for harsh and wet environments.

### Features and Benefits:

- Rugged design for weather resistant operation, and protection from vandalism
- Flexible mounting options
- Compatible with MiFare cards & ISO magnetic stripe cards
- Superior reading of jitter, scratched, and worn MagStripe cards
- Reliable MagStripe reader for a minimum of one million passes
- Signifies successful read operation with beeper and LED indicator
- Dual-head design for MagStripe reading in both directions
- RS-232, USB HID interfaces



**IDTECH®**  
Value through Innovation

# OmniFare™ Specifications IDCA-37XX

## Electrical

Power Requirements: +5 VDC +/-10%, 65mA Max. combined magnetic stripe and contactless  
Interfaces: RS-232, USB HID

## Environmental

Operating Temperature: 0°C to 55°C (32°F to 122°F)  
Storage Temperature: 0°C to 70°C (32°F to 158°F)  
Extended Temperature: -25°C to 60°C (-13°F to 140°F)  
Humidity: 8 to 95% with Wet bulb at 23°C (73°F) non-condensing

## Reliability


Operating Life: 1,000,000 cycles minimum  
Warranty: Two years, parts and labor

## Mechanical

Media Thickness: MagStripe: 0.015 inches (0.381mm) to 0.038 inches (1mm)  
Media Formats: MagStripe: ISO 7811, AAMVA, and other F2F formats  
Slot Width: 0.040 inches (1mm)  
Swipe Speed: MagStripe: 3 to 60 inches per second, bi-directional  
Dimensions(L)x(W)x(H): 5 inches (127mm) x 2.05 inches (52mm) x 2.05 inches (52mm)  
Weight: 1.4 lb (including power pack)  
Cable Length: 6-foot straight cable  
Cable Connector: RS-232 interface, RS-232 DE9 connector  
USB interface, terminated with USB-A



## Foot Print:

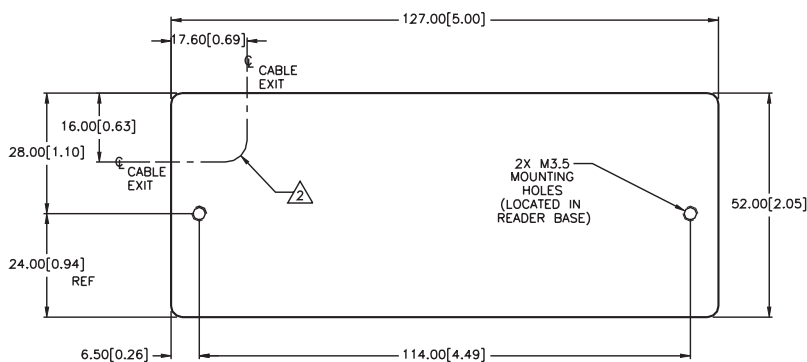

**IDTECH®**  
Value through Innovation

### Corporate Headquarters:

10721 Walker Street, Cypress, California 90630  
www.idtechproducts.com  
(714) 761-6368 sales@idtechproducts.com

### International Sales Office

#### Canada & South America:

+450 465 5261 (Canada) robertop@idtechproducts.com

#### European Sales Offices:

+49(0) 8851 6159900 (Germany)  
emea@idtechproducts.com

**ISO 9001 Certified**